


Splice Detection Technology - 1088 Series

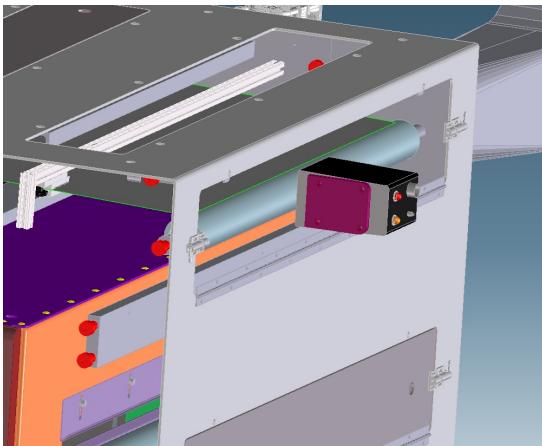

Prevent Costly Repair

The Model 1032BM Black Mamba® Web Press Splice Detector™ & Distribution Technology detects the presence of splices in the material web being processed on a high speed web press. The Model 1032BM Black Mamba® generates output signals to notify press print stations that a splice has been detected. The spacing tolerance between the press print heads or station is very close to the web creating potential to damage the print heads by passing splices when the press is in ready position. Detection of a splice in the web is critical to allow the system sufficient time to protect the print heads/station.

In general, the Model 1032BM Black Mamba® Technology:

- 100% Reliably detect "ALL" splices in the web
- Generate a signal upon detection of a splice
- Provide a fail-safe mechanism to notify the press system that the sensor subsystem is connected and functioning

Theory of Operation

Digital signals relative to the common reference are output from the Model 1032BM Black Mamba® Control System and input to the web press electronics. The signals are used to indicate three states.

The three states represented by the splice signal include the "idle" state, the "splice detected" state, and the "fault" state.



SPLICE DETECTOR

1032B™ BLACK MAMBA

TECHNICAL SPECIFICATIONS

Defects Detected:	Splices & Web Breaks								
Material Compatibility:	Papers, Plastics & Films								
Total Web Thickness:	0.175" (4.45 mm) Max.								
Gap Width:	0.25" (6.35 mm)								
Maximum Web Speed:	No Limits								
Relay Alarm Outputs:	<table><tr><td>Dry Output Contact Closures:</td><td>2 (Non-inductive) 0.1 Amp</td></tr><tr><td>Current at 110 VAC:</td><td>0.05 Amp</td></tr><tr><td>Current at 220 VAC:</td><td>1 Second</td></tr><tr><td>Alarm On Period:</td><td></td></tr></table>	Dry Output Contact Closures:	2 (Non-inductive) 0.1 Amp	Current at 110 VAC:	0.05 Amp	Current at 220 VAC:	1 Second	Alarm On Period:	
Dry Output Contact Closures:	2 (Non-inductive) 0.1 Amp								
Current at 110 VAC:	0.05 Amp								
Current at 220 VAC:	1 Second								
Alarm On Period:									
Electronic Alarm Output:	<table><tr><td>Pulse Outputs:</td><td>1</td></tr><tr><td>Voltage:</td><td>24VDC (\pm 3 V)</td></tr><tr><td>Direction:</td><td>Positive Going</td></tr><tr><td>Duration (3 Selectable):</td><td>1 millisecond 10 milliseconds 100 milliseconds</td></tr></table>	Pulse Outputs:	1	Voltage:	24VDC (\pm 3 V)	Direction:	Positive Going	Duration (3 Selectable):	1 millisecond 10 milliseconds 100 milliseconds
Pulse Outputs:	1								
Voltage:	24VDC (\pm 3 V)								
Direction:	Positive Going								
Duration (3 Selectable):	1 millisecond 10 milliseconds 100 milliseconds								
Cabling Specifications	The cabling is flex rated to 10k cycles and meets the following regulatory requirements:								
Ambient Temperature:	40 to 160° F (4 to 70° C)								
Sensor Dimensions:	6.0" X 7.5" X 4.37" (15.24 cm X 19.05 cm x 11.1 cm)								
Sensor Weight:	10 lbs./ 4.53 kilogram								
Distribution Control Dimensions:	16.0" X 16.0" X 8" (40.64 cm X 40.64 cm X 20.32 cm)								
Distribution Control Weight:	17.5 lbs./ 7.93 kilogram								
Power:	120/220 VAC, 50/60 Hz, Single Phase								

Specifications are subject to change without notice.



R.K.B. OPTO-ELECTRONICS, INC.


6677 Moore Road • Syracuse, New York • 13211 • United States of America

Tel: +001-315-455-6636 • Fax: +001-315-455-8216 • Email: sales@splicedetector.com

Internet: www.rkbopto.com / www.splicedetector.com / www.splicedetector.net

Splice Detection Technology - 1088 Series

The idle state is represented by a continuous stream of pulses of a defined duration called the heartbeat. The splice detected event is represented by a single pulse of defined duration. The fault state is represented by a continuous (i.e., not pulsing) signal.

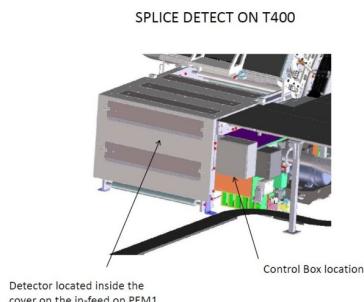

The web press electronics will sample and process incoming pulses to determine whether it's a heartbeat, a splice detect event, a combination of both superimposed on each other in time, or a fault condition. Short pulses within a defined tolerance of the heartbeat pulse will be interpreted as a heartbeat. Longer pulses within a defined tolerance will be interpreted as a splice event. Pulse widths that do not match the specification will be considered fault conditions. Missing heartbeat pulses or a static signal state will also be considered a fault condition.

Upon the detection of a "fault" condition the print heads/station will be retracted allowing the defective paper to pass uninterrupted by the print station thus protecting the sensitive print station from damage.

Benefits

- 100% splice fault detection "Guaranteed".
- Fail safe to notify the press that the Black Mamba is connected and functioning.
- Limits emergency down time caused by damaged print heads/stations.
- Allows the end user (print maker) to purchase and utilize any roll of paper.
- Eliminates the need for "SPLICE FREE PAPER" to be required saving money.
- Cuts print head/station replacements saving thousands of dollars per year.
- Significantly improves marketability of press sales to end users.
- Facilitates increased market share thus increase annual revenues.


Call RKB

Call us to discuss your material registration applications and to learn more about the industry's most complete line of web inspection related products.

SPLICE DETECTOR

R.K.B. Technology

SPLICE DETECT ON T400

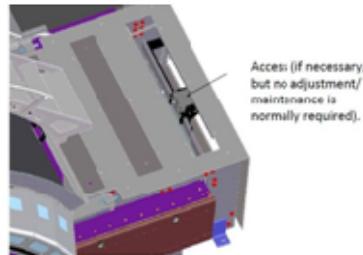

The R.K.B. based implementation is comprised of two distinct devices including an RKB Splice Detector and a Central Control Station. The sensor unit detects splices and outputs a pulse to indicate the defect "fault" event. The pulse is input to the central control station which combines incoming splice fault signals with a periodic time based ("heartbeat") signal and control processing circuitry. The resulting signal is output via a set of cabling and isolation circuitry to the web press electronics.

The processing circuits in the control console disables the heartbeat output if the sensor unit is not "powered on" or the splice fault signal is not connected. In addition, an option to disable the "heartbeat" independently for each output channel at field installation time is supported. In the latter case, splice fault events detected by the sensing unit will exist in each channel with or without the "heartbeat" depending on the installations specific settings.



Expect Reliability

With installations in over 130 countries worldwide, our splice detection technologies have been

effectively established to ensure delivered product superiority on tens of thousands of materials, coated and non-coated such as papers, films, nonwovens, textiles, and tapes. Our splice detection technologies are installed on many types of machinery including sheeters, on and off machine coaters, extrusion laminators, supercalenders, rotogravure and flexographic printing presses, holographic processes, textile and nonwoven machinery. Low speed to high speed, R.K.B. Splice Detectors are proven time and time again to be the leader in performance, reliability and price.

R.K.B. OPTO-ELECTRONICS, INC.

6677 Moore Road • Syracuse, New York • 13211 • United States of America

Tel: +001-315-455-6636 • Fax: +001-315-455-8216 • Email: sales@splicedetector.com

Internet: www.rkbopto.com / www.splicedetector.com / www.splicedetector.net